Detached Emergency Driver with Bluetooth® 5.0 SIG Mesh

HBEM01

Constant Current, Self-Test

HYTRONIK®

Product Description

HBEM01 is a combined Bluetooth LED driver & emergency control gear with RJ12 connection for optional sensor heads SAM20, SAM21, SAM22, SAM23, HIR05, HIR05/FM, HIR07, HIR11 series, HIR12, HIR63 series. When the sensor head is not attached to, HBEM01 alone is a normal Bluetooth emergency driver with self-test function. When the sensor head is attached to, HBEM01 is a normal Blutooth emergency driver with motion, daylight sensor and self-test function. With gateway HBGW01 ready, user can generate emergency testing report through our Koolmesh™ app. HBEM01 can also conduct monthly or annually testing automatically and user can get email notification as soon as fault is detected. Meanwhile, simple device setup and commissioning can be done via Koolmesh™ app.

App Features

- Quick setup mode & advanced setup mode
- Floorplan feature to simplify project planning
- Web app/platform for dedicated project management
- Koolmesh Pro iPad version for on-site configuration
- Grouping luminaires via mesh network
- Scenes
- Dusk/Dawn photocell (Twilight function)
- Push switch configuration
- Internet-of-Things (IoT) featured
- Device firmware update over-the-air (OTA)
- Device social relations check
- Bulk commissioning (copy and paste settings)
- Offline commissioning
- Different permission levels via authority management
- Network sharing via QR code or keycode
- Remote control via gateway support HBGW01
- Interoperability with Hytronik Bluetooth product portfolio
- Continuous development in progress…

Hardware Features

- Switch-Dim
- Photocell Advance
- Active PFC design
- Open-circuit Protection
- Short-circuit Protection
- Overload Protection
- 5-year warranty, designed for long lifetime up to 50,000 hours

Emergency Features

- Multi emergency wattage: 2W/3W
- Emergency working mode:
  - Normal emergency mode
  - Rest mode
  - Inhibit mode
  - Extended emergency mode
- Monthly/Quarterly/Annually Automatic Testing with report generation
- Battery status check via Koolmesh app
- Automatic email notification when fault is detected
- Retrievable usage data and report history

EnOcean
Self-powered IoT

Fully support
EnOcean switch
EWSSB/EWSDB

Draft

Technical Specifications

Bluetooth Transceiver	
Operation frequency	2.4 GHz - 2.483 GHz
Transmission power	4 dBm
Range (Typical indoor)	10~30m
Protocol	Bluetooth® 5.0 SIG Mesh





Model No.	HBEM01
Mains voltage	220~240VAC 50/60Hz
Mains current	0.162~0.15A
Max. output wattage	25W
Output wattage / LED current / voltage	7-15.6W / 300mA / 24-52V 12-25W / 500mA / 24-50V 16-25W / 700mA / 24-36V
Efficiency	>82
Output voltage(U-out Max.)	60V
Power factor	>0.9
Operation temperature	0~+50°C
Storage temperature	-10~+35°C
Battery charge current	0 - 500mA
Battery pack	BPC83, BPC84
Battery Type (LiFePO4) / Charge current / Discharge current / Max. load / Discharge hour	BPC83/BPC84: 6.4V, 3.4AH / 0.45A, 2W@24 - 52V / 180min BPC83/BPC84: 6.4V, 3.4AH / 0.65A, 3W@24 - 52V / 180min
Charge period	16h
Max. case temp.	80°C
Abnormal protection	Output short-circuit protection, Overload Protection, Open-circuit Protection
Battery abnormal protection	Short circuit protection
	Reverse connection protection
	Deep discharge
EMC standard	EN55015, EN61547, EN61000-3-2, EN61000-3-3
Safety standard	EN61347-1, EN62493, EN61347-2-7, EN62034, IEC62133
Certifications	CE , EMC, ROHS
IP grade	IP20

Draft

Mechanical Structure & Dimensions

HBEM01

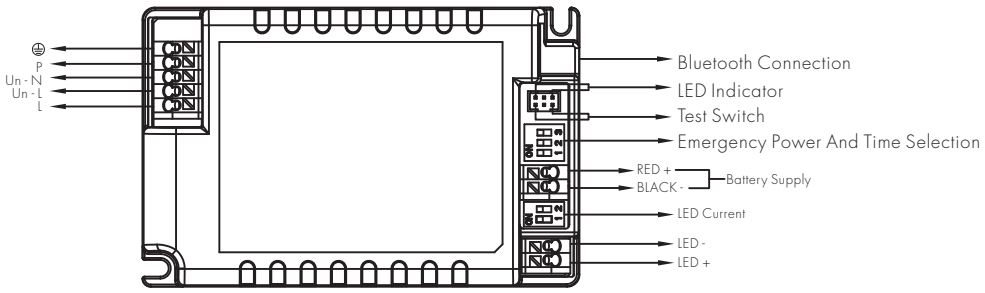

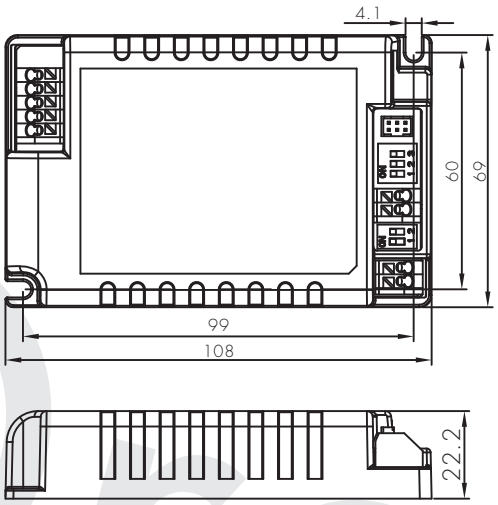

Draft

Wire Preparation



Solid or Stranded wire type 0.75 - 1.5mm²
To make or release the wire from the terminal, use a screwdriver to push down the button.

Wiring Diagram

Ordinary Connections

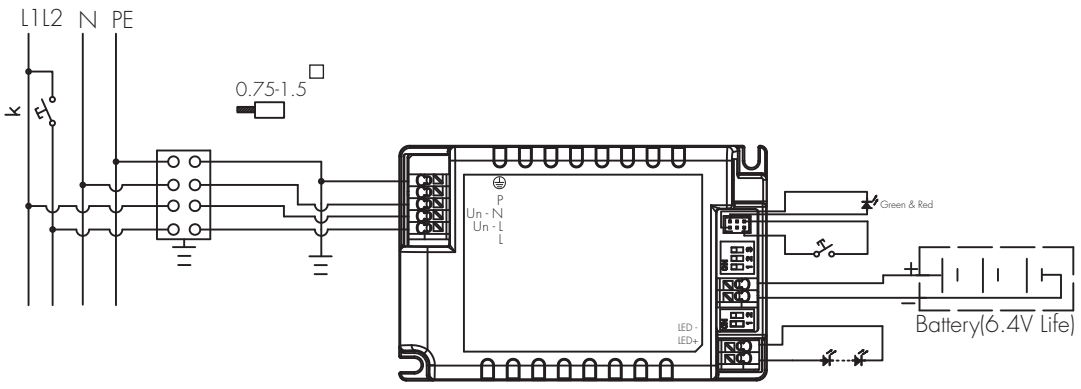

Switch-Dim Connections

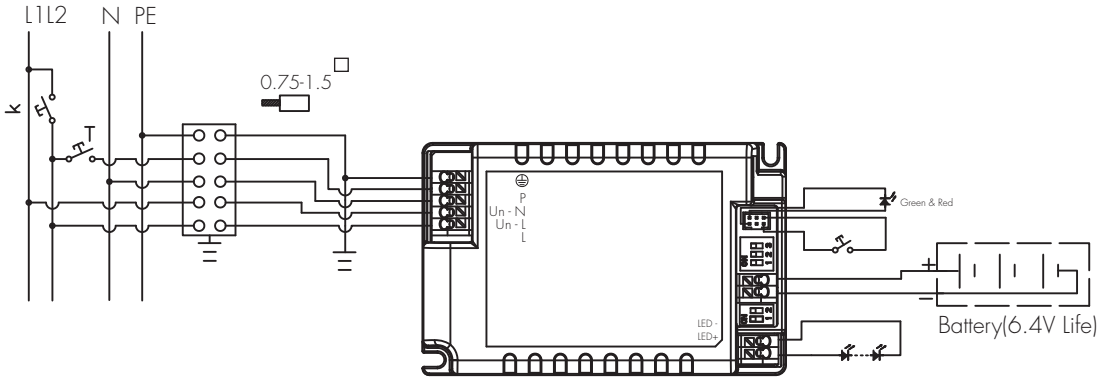

Switch-Dim Connections with Bluetooth receiver node

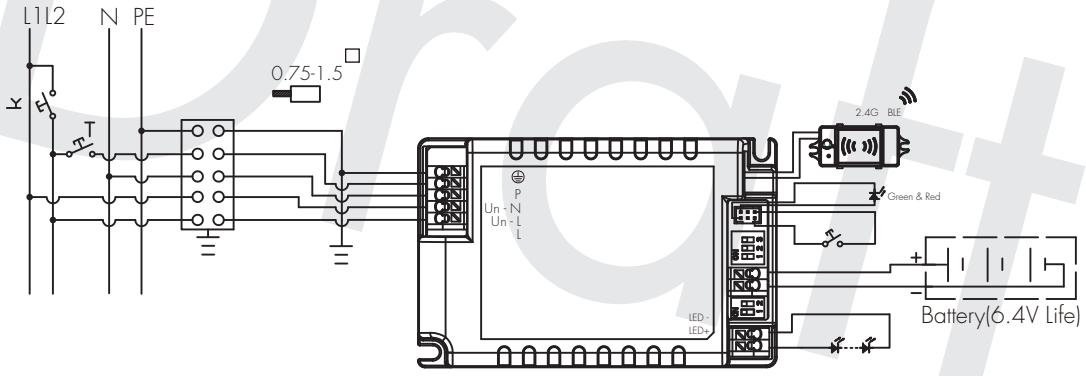

Draft

Loading and In-rush Current

Model	HBEM01
In-rush Current (Imax.)	21A
Pulse Time	80 μs

Circuit Breaker Information

Automatic circuit breaker type	B16A	B10A	B13A	B20A	B25A
HBEM01	114	72	92	142	178

Calculation uses typical values from ABB series S200 as a reference. E.g. Maximum amount =16/(Pn/230). We recommend to use no more than 60% of the data as the actual max. number of drivers in real application.
Actual values may differ due to used circuit breaker types and installation environment.

Performance Characteristics

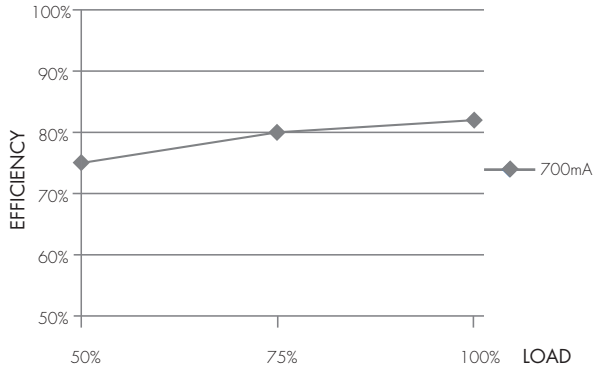

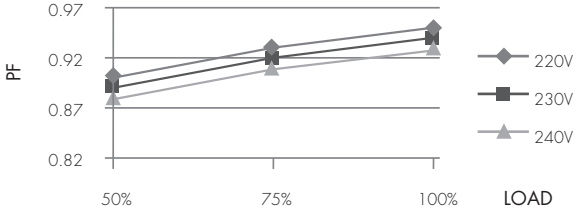

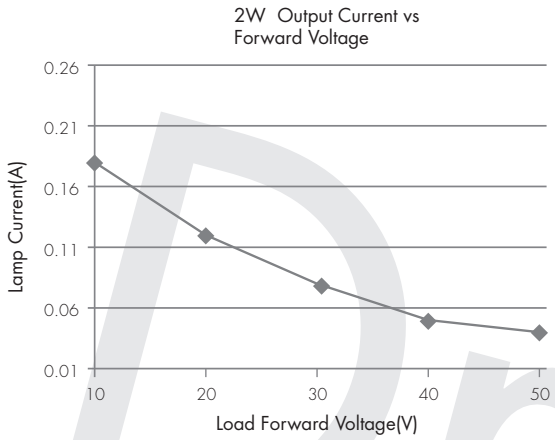

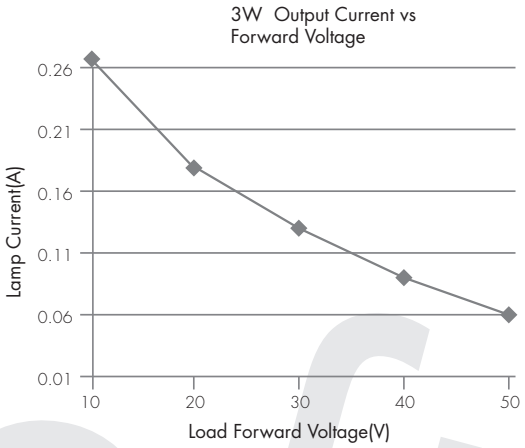

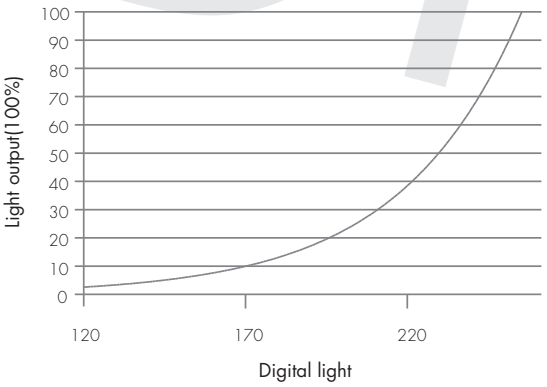

Draft

Normal Mode

It is the mode in which mains supply is available, with the battery charged or charging. In this mode, HBEM01 is a dimmable emergency driver, with ability to create scenes and controllable by motion sensor, Push switch and app.

Emergency Mode

Ilt is the mode in which mains supply has failed and whilst the control gear is powered by the battery until deep discharge point. In this mode, HBEM01 is unable to be controlled by motion sensor, Push switch and app. However, some emergency parameterscan still be configured via the app, such as time scheduled for self-test, duration for extended emergency mode etc.

Rest Mode

Ilt is the mode in which the luminaire is intentionally off whilst the control gear is powered by the battery. To enter this mode, the prerequisite is that there is no mains supply. In this mode, the luminaire will be turned off automatically and HBEM01 is powered by the battery. If the luminaire is forced to turn on in this mode, HBEM01 will then be adjusted to emergency mode. When mains supply is recovered, HBEM01 will return to normal mode.

Inhibit Mode

Ilt is the mode in which HBEM01 is powered from the mains but prevented from going into emergency mode in the event of mains failure.Please enter this mode only in special applications whereby emergency function is not needed, such as when electrician needs to cut off power supply when doing examination and maintenance work for HBEM01.

Extended Emergency Mode

Ilt is the mode in which the control gear continues to operate the lamp in the same way as in emergency mode for the programmed prolong time after the restoration of the mains supply. When this mode is enabled, HBEM01 will remain in emergency mode even when mains supply is recovered. In this mode, the user has to set the time extended for emergency mode; when the time extended elapses, HBEM01 will then return to normal mode.

Self test (Monthly)

HBEM01 carries out routine test on emergency lighting based on pre-programmed time via the app or after receiving manual commands from the app. During the self test process, tests for load connections (such as open circuit, short-circuit) and battery connections (such as open circuit, short-circuit, polarity reversal etc.) will be carried out.

Self test (every 6 month and annually)

The test is carried out mainly to check the battery level. The user has to make sure that the battery for HBEM01 is fully charged before HBEM01 carries out 6-month test or annual test. Also, the battery lifetime statistics will be analysed and displayed on a chart basis.

LED Diagnostics

Indicator Colour	Status	Meaning
GREEN SOLID	Device OK	All OK, AC power is present. Battery is connected & charging
GREEN FAST FLASH (0.1s ON, 0.1s OFF)	Weekly test	AC power is present. Weekly test in progress
GREEN FAST FLASH (0.1s ON, 0.1s OFF)	Monthly test	AC power is present. Monthly test in progress
GREEN SLOW FLASH (1s ON, 1s OFF)	6 months test	AC power is present. 6 months (discharge) test in progress
GREEN VERY SLOW FLASH (1s ON, 1s OFF)	12 months test	AC power is present. Automatic discharge test has completed within the last 7 days and was OK
RED SOLID	Emergency LED fault	Emergency LED is open circuit, short circuit or has otherwise failed in some way,. Fault can indicate the live status or the result of a test
RED SLOW FLASH (1s ON, 1s OFF)	Battery fault	Battery failure (Battery failed the duration or functional test, battery appears to be defective, battery has incorrect voltage). Fault can indicate the live status or the result of a test
RED /GREEN OFF	No power available	AC power is lost, unit in emergency mode

Draft

Battery Pack Options

Package code	Picture	Spec.	Size (mm)	Duration	Recharge Time	Accessories
BPC83		LiFePO4, 6.4V, 3.4Ah	110x55x27	3h @3W 3h @2W	16h	Battery bracket, LED indicator, Test switch
BPC84		LiFePO4, 6.4V, 3.4Ah	170x30x27	3h @3W 3h @2W	16h	Battery bracket, LED indicator, Test switch

Please kindly note that the optimal storage temperature should be 22°C to28°C.
The relative humidity (RH) for battery storage should be 45% to 85%.
Keep the battery wires unconnected if the battery is intended to be stored for more than 3 months.
The maximum battery cycles under 55°C should not exceed 80 times.
Please kindly charge battery for 24 hours before using.
Do not short-circuit the battery pack.

Technical Specifications for Sensor Heads

PIR Sensor Properties	
Sensor principle	PIR detection
Operating voltage	5VDC
Detection range *	HIR05 & HIR05/FM & & HIR07 Max installation height: 3m Max detection range: 6m (diameter) HIR11 Max installation height: 15m (forklift) 12m (single person) Max detection range: 24m (diameter) HIR12 Max installation height: 15m (forklift) 12m (single person) Max detection range: 18m * 6m (L * W) HIR63 Max installation height: 3m Max detection range: 12m (diameter) HIR63/R Max installation height: 8m Max detection range: 10m (diameter)

HF Sensor Properties	
Sensor principle	High Frequency (microwave)
Operating voltage	5VDC
Operation frequency	5.8GHz +/- 75MHz
Transmission power	<0.2mW
Detection range *	SAM20 / SAM21 / SAM22 Max installation height: 3m Max detection range: 12m (diameter) SAM23 Max installation height: 15m (forklift) 12m (single person) Max detection range: 20m (diameter)

* The detection range is heavily influenced by sensor placement (angle) and different walking paces. It may be reduced under certain conditions.

PIR & microwave sensor heads

The range of PIR and microwave sensor heads below offers powerful number of Plug'n'Play feature options to expand the flexibility of luminaires design. This approach to luminaire design reduces space requirements and component costs whilst simplifying production.

A. HIR05
PIR sensor head
The cable length is around 65cm.







B. HIR05/FM
PIR sensor head
The cable length is around 65cm.

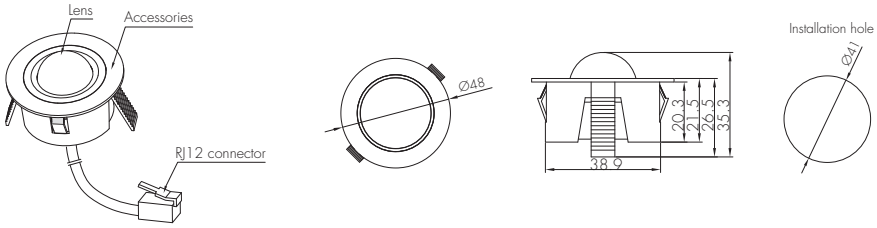

C. HIR07
PIR sensor head
Photocell Advance™
The cable length is around 30cm.

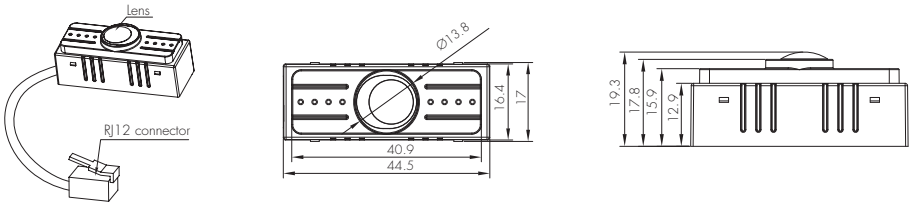

D. HIR11/S
PIR sensor head
Surface mounting
For highbay application
IP65 (facia / lens part)
The cable length is around 65cm.

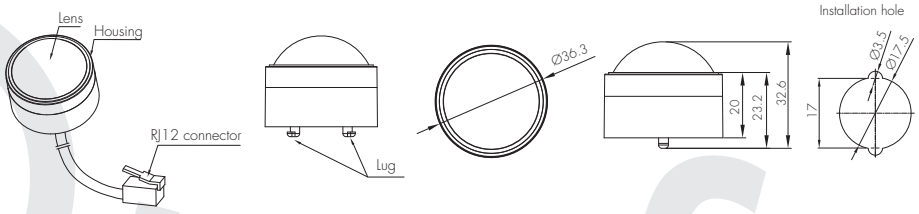

E. HIR11/F
PIR sensor head
Flush mounting
For highbay application
IP65 (facia / lens part)
The cable length is around 65cm.

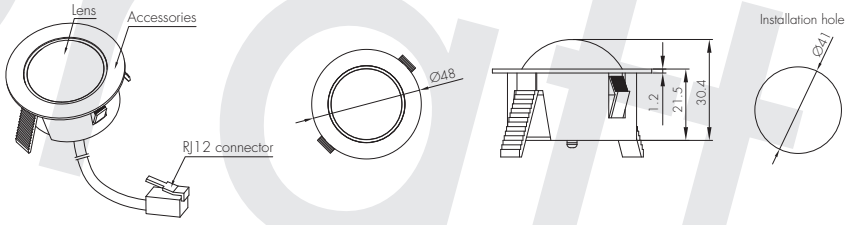

F. HIR11/C
PIR sensor head
Screw to the luminaire by conduit
For highbay application
IP65 (facia / lens part)
The cable length is around 65cm.

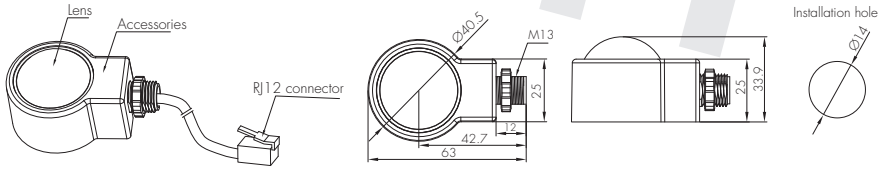

G. HIR12
PIR sensor head
For highbay application
IP65 (facia / lens part)
The cable length is around 65cm.

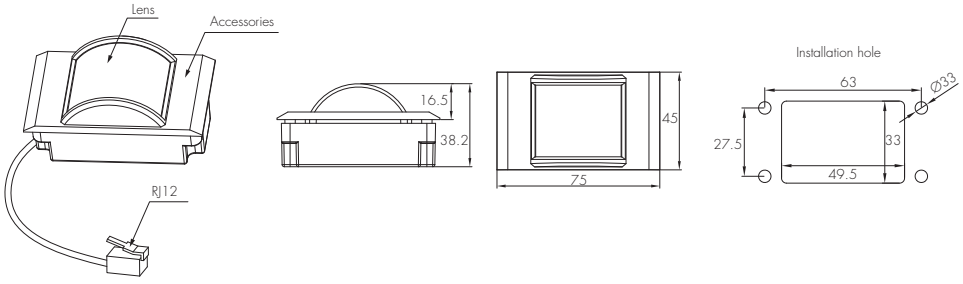

Installation for HIR12

We suggest that the metal plate thickness to be 0.8mm – 1.6mm to ensure perfect focal length for the PIR lens.

Draft

H. HIR63
PIR sensor head
The cable length is around 65cm.

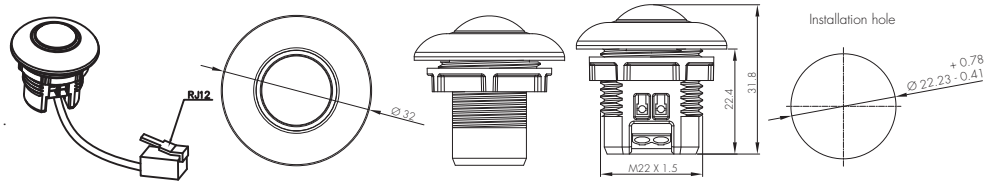

I. HIR63 with HA04
PIR sensor head
The cable length is around 65cm.

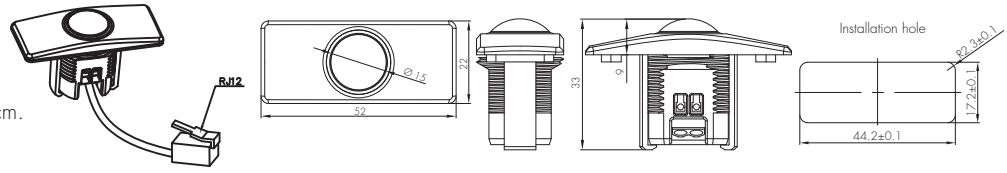

J. HIR63 with HA05
PIR sensor head
The cable length is around 65cm.

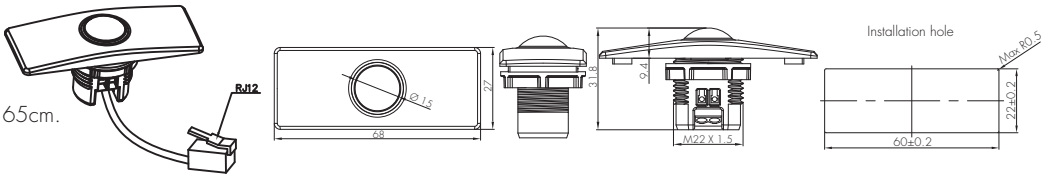

K. HIR63/R
PIR sensor head
IP65 (facia / lens part)
The cable length is around 65cm.

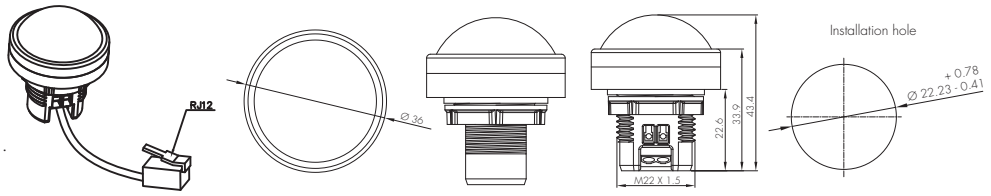

L. SAM20
HF sensor head
Photocell Advance™
The cable length is around 30cm.

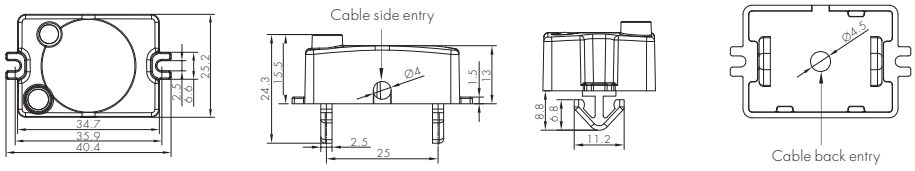

M. SAM21
HF sensor head
IP65
The cable length is around 65cm.

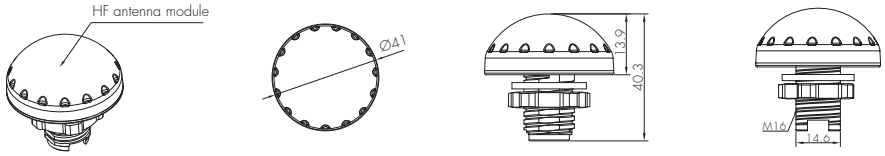

N. SAM22
HF sensor head
Flush mount
The cable length is around 65cm.

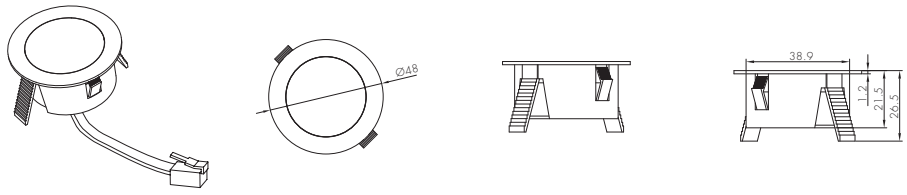

O. SAM23
HF sensor head
Photocell advance™
For highbay application
The cable length is around 30cm.

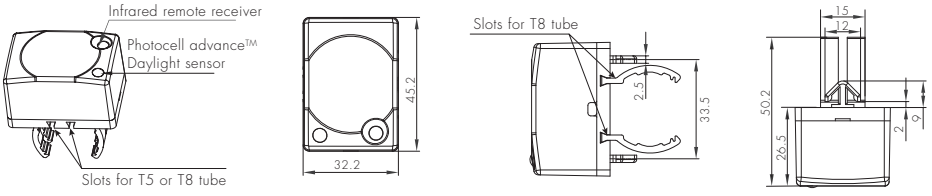

Detection Pattern

SAM23

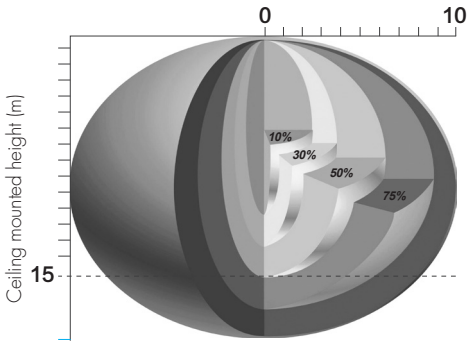

Ceiling mounted detection pattern (m)

SAM20 / SAM21 / SAM22

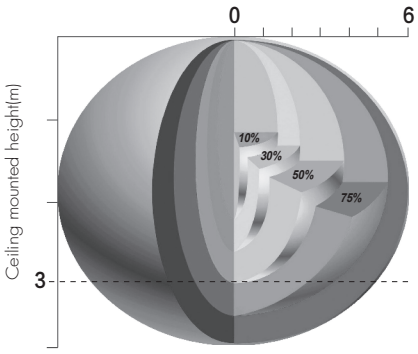

Ceiling mounted detection pattern (m)

HIR05 & HIR05/FM & HIR05/E & HIR07

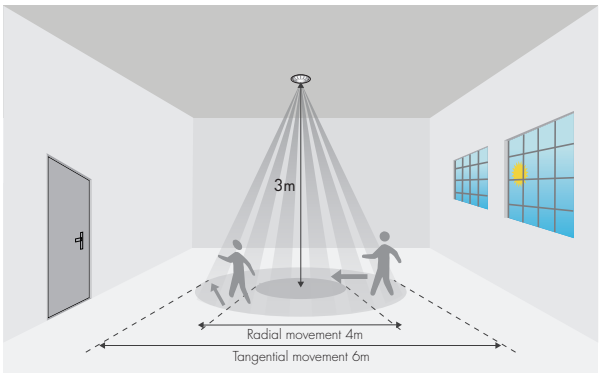

HIR12

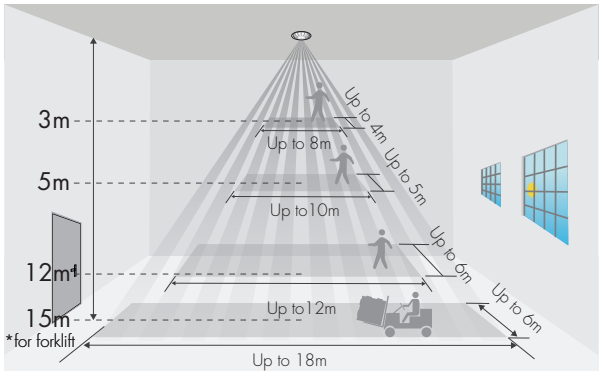

HIR63

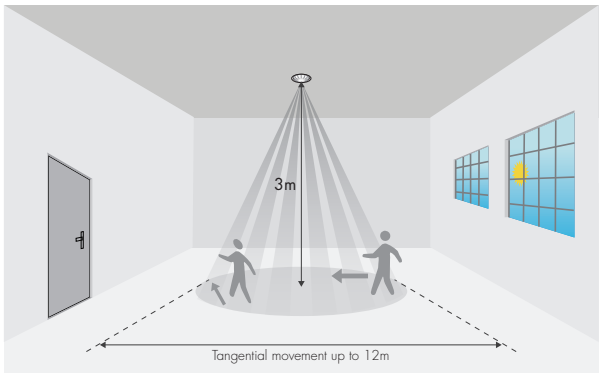

HIR63/R

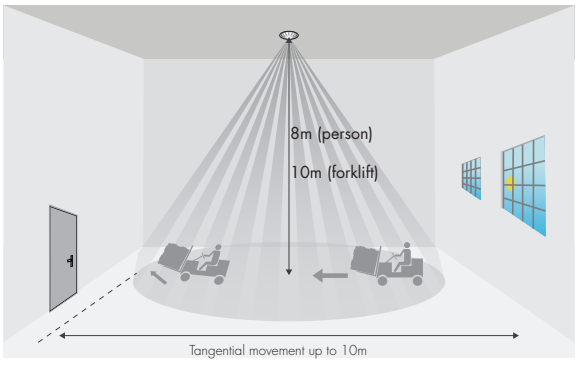

*The detection patterns are based upon 5km/h movement speed.

HIR11 (High-bay)

HIR11: High-bay lens detection pattern for **forklift** @ Ta = 20°C

(Recommended installation height **10m-15m**)





Mount height	Tangential (A)	Radial (B)
10m	max 380m² (Ø = 22m)	max 201m² (Ø = 16m)
11m	max 452m² (Ø = 24m)	max 201m² (Ø = 16m)
12m	max 452m² (Ø = 24m)	max 201m² (Ø = 16m)
13m	max 452m² (Ø = 24m)	max 177m² (Ø = 15m)
14m	max 452m² (Ø = 24m)	max 133m² (Ø = 13m)
15m	max 452m² (Ø = 24m)	max 113m² (Ø = 12m)

HIR11: High-bay lens detection pattern for **single person** @ Ta = 20°C

(Recommended installation height **2.5m-12m**)





Mount height	Tangential (A)	Radial (B)
2.5m	max 50m² (Ø = 8m)	max 7m² (Ø = 3m)
6m	max 104m² (Ø = 11.5m)	max 7m² (Ø = 3m)
8m	max 154m² (Ø = 14m)	max 7m² (Ø = 3m)
10m	max 227m² (Ø = 17m)	max 7m² (Ø = 3m)
11m	max 269m² (Ø = 18.5m)	max 7m² (Ø = 3m)
12m	max 314m² (Ø = 20m)	max 7m² (Ø = 3m)

Additional Information / Documents

1. Regarding precautions for Bluetooth product installation and operation, please kindly refer to www.hytronik.com/download/knowledge ->Bluetooth Products - Precautions for Product Installation and Operation

2. Regarding precautions for LED driver installation and operation, please kindly refer to www.hytronik.com/download/knowledge ->LED Drivers - Precautions for Product Installation and Operation

3. Regarding precautions and usage for LiFePO4 battery, please kindly refer to www.hytronik.com/download/knowledge ->LiFePO4 Battery - Precautions and Usage

4. Data sheet is subject to change without notice. Please always refer to the most recent release on www.hytronik.com/products/bluetooth technology ->Bluetooth Emergency Driver/Inverter

5. Regarding Hytronik standard guarantee policy, please refer to www.hytronik.com/download/knowledge ->Hytronik Standard Guarantee Policy