

Product Description

HHC2045 (max. 45W) and HHC2050L (max. 50W) are Tunable White LED drivers which are specially designed to work with Hytronik Human Centric sensors. By simply connecting Bluetooth sensor head HBT01/HBT02/HIR13/HIR16 to the driver, it allows for motion detection and Bluetooth mesh control. Once the sensor head is connected to the driver, COM inputs are then disabled, and sensor antenna will take control. With Bluetooth wireless mesh networking, it makes communication between luminaires much easier without time-consuming hardwiring, which eventually saves costs for projects. Meanwhile, simple device setup and commissioning can be done via **Koolmesh™** app.



App Features

- Quick setup mode & advanced setup mode
- Tri-level control
- Daylight harvest
- Circadian rhythm (Human centric lighting)
- Floorplan feature to simplify project planning
- Web app/platform for dedicated project management
- Koolmesh Pro iPad version for on-site configuration
- Grouping luminaires via mesh network
- Scenes
- Dusk/Dawn photocell (Twilight function)
- Push switch configuration
- Schedule to run scenes based on time and date
- Astro timer (sunrise and sunset)
- Staircase function (primary & secondary)
- Internet-of-Things (IoT) featured
- Device firmware update over-the-air (OTA)
- Device social relations check
- Bulk commissioning (copy and paste settings)
- Dynamic daylight harvest auto-adaptation
- Power-on status (memory against power loss)
- Offline commissioning
- Different permission levels via authority management
- Network sharing via QR code or keycode
- Remote control via gateway support HBGW01
- Interoperability with Hytronik Bluetooth product portfolio
- Compatible with EnOcean BLE switches
- Continuous development in progress...

Hardware Features

- Switch-Dim
- COM inputs for dimming and colour tuning via DALI broadcast
- Plug'n'Play for flexible installation and cost saving assemble
- 4 types of optional sensor heads available
- Photocell Advance
- Insulated terminal cover with cord restraint (for HHC2045)
- Standby power <0.5W
- Active PFC design
- Linear dimming
- Over-temperature Protection
- Short-circuit Protection
- Overload Protection
- 5-year warranty, designed for long lifetime up to 50,000 hours



Current Output Configuration

HHC2045

1200mA	●●●●●
1050mA	●●●●○
900mA	●●●○○
700mA	●●○○○
500mA	●○○○○
350mA	○○○○○
	1 2 3 4 5



Warning: Please make sure the correct current is selected before starting the driver!

HHC2050L


Single current 1.05A, can be customized.

Technical Specifications


Input	Mains Voltage	220~240VAC 50/60Hz	
	Mains Current	0.22~0.2A(HHC2045); 0.3-0.25A(HHC2050L)	
	Power Factor	0.95	
	Max. Efficiency	85%	
	Dielectric Strength	Input→Output : 3000VAC	
	Leakage Current	< 0.25mA	
Output	Power/Current/ Voltage Range (HHC2045)	20W/350mA/10~56V	28W/500mA/10~56V 39W/700mA/10~56V
		45W/900mA/10~50V	42W/1050mA/10~40V 41W/1200mA/10~34V
	Power/Current/ Voltage	50W/1.05A/12-48V (HHC2050L, can be customized)	
	Output power handling	Channel 1 (CH1) + Channel 2 (CH2) = 45W (HHC2045)/50W (HHC2050L) max.	
	Output channel function	CH1 = Cool white CH2 = Warm White	
	Ripple Current	<3%	
	Uout Max.	75V(HHC2045); 70V(HHC2050L)	
Turn-on Time	< 0.5s		
Environment	Operation Temp.	Ta: -20 ~ +50°C(HHC2050L), -20 ~ +45°C(HHC2045)	
	Case Temp. (Max.)	80°C(HHC2050L), 85°C(HHC2045)	
	IP Rating	IP20	
Safety and EMC	EMC standard	EN55015, EN61547, EN61000-3-2, EN61000-3-3	
	RED standard	EN300328, EN301489-1, EN301489-17	
	Safety standard	EN61347-1, EN62493, EN61347-2-13	
	Certifications	CB, CE, EMC, RCM	

Mechanical Structure & Dimensions

HHC2045

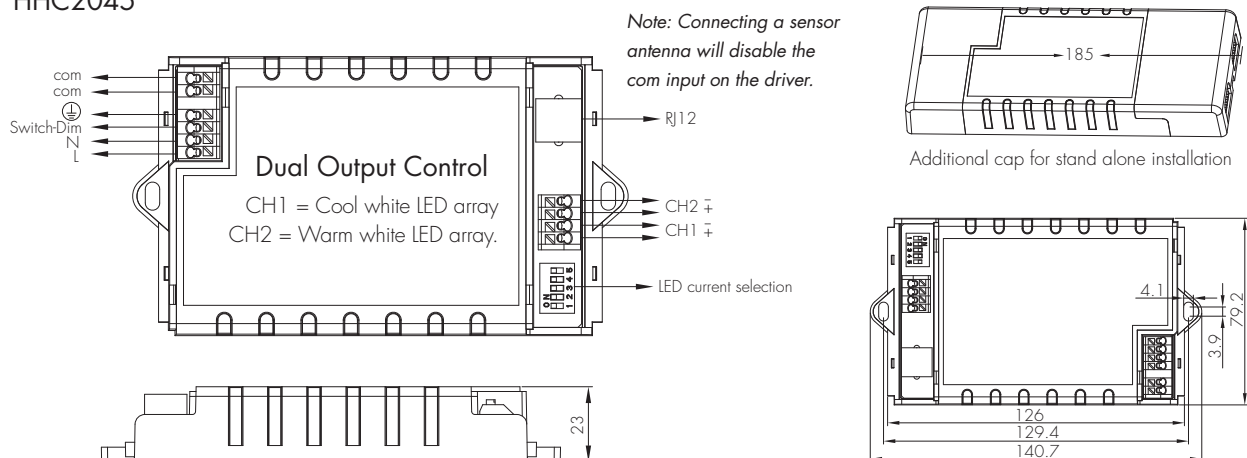

HHC2050L

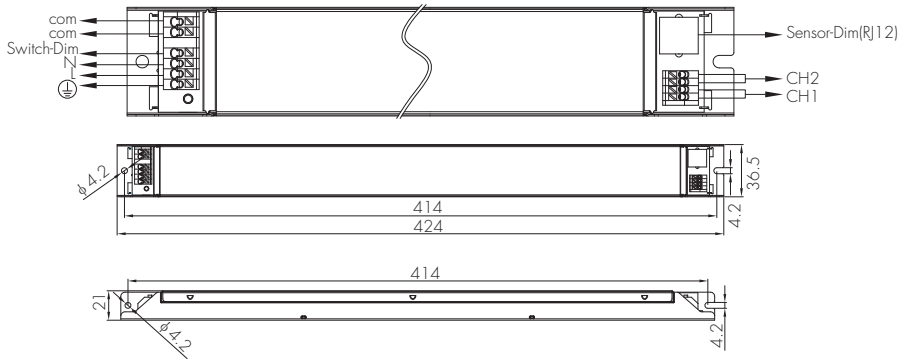

Note: Connecting a sensor antenna will disable the com input on the driver.

Dual Output Control


CH1 = Cool white LED array
CH2 = Warm white LED array.

* COM inputs: HHC2045 and HHC2050L are not standard DT8 tunable white driver, they are not DALI addressable but they can achieve colour tuning and dimming via DALI broadcast.

Wiring Diagram


HHC2045

Antenna Connections (Sensor-Dim)

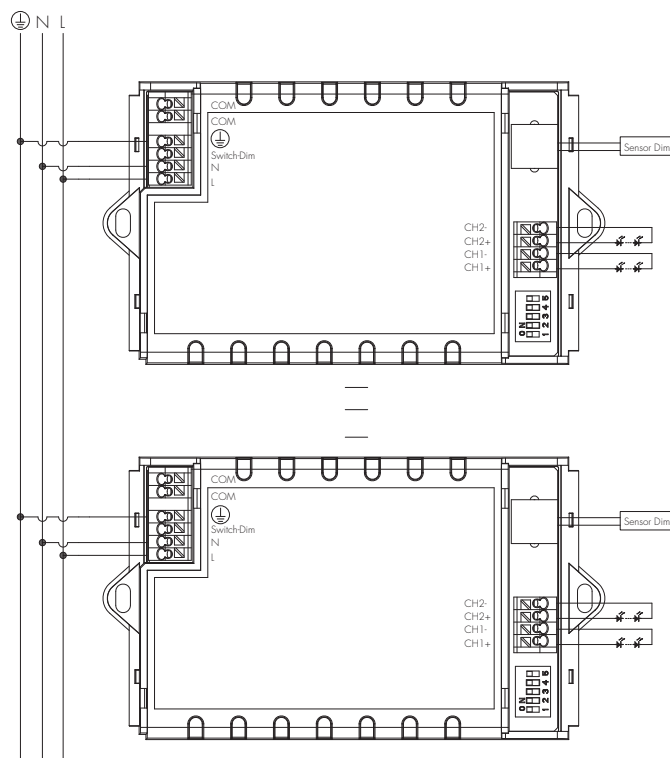


HHC2045

Com Connections (When used together with Hytronik DALI motion sensors)

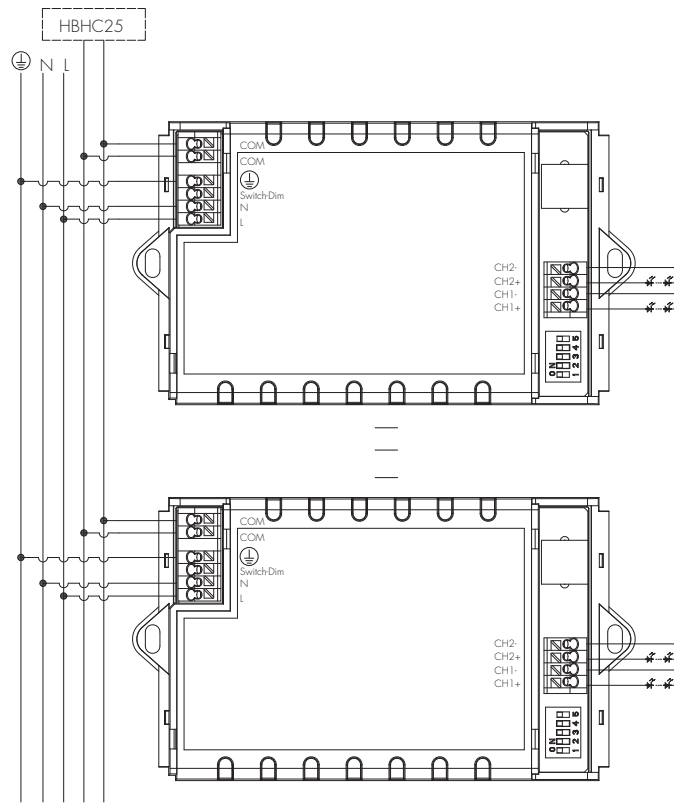


HHC2045

Switch-Dim Connections

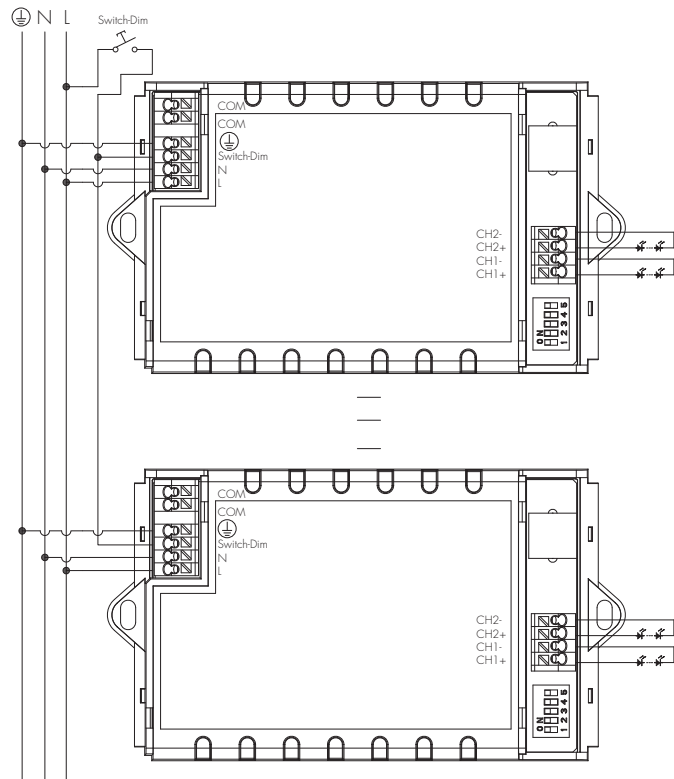


HHC2050L

Antenna Connections (Sensor-Dim)

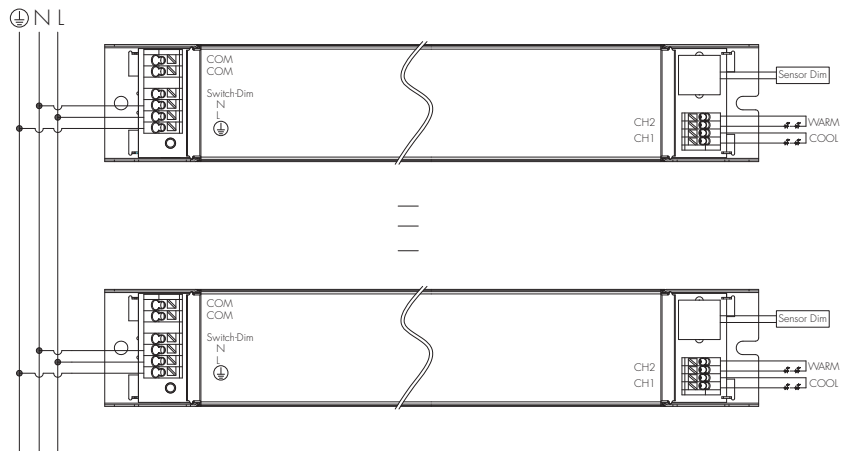


HHC2050L

Com Connections (When used together with Hytronik DALI motion sensors)

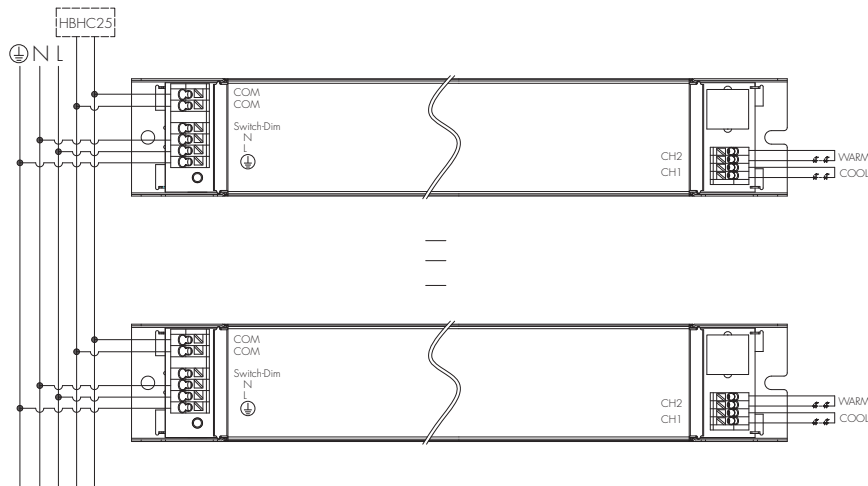


HHC2050L

Switch-Dim Connections

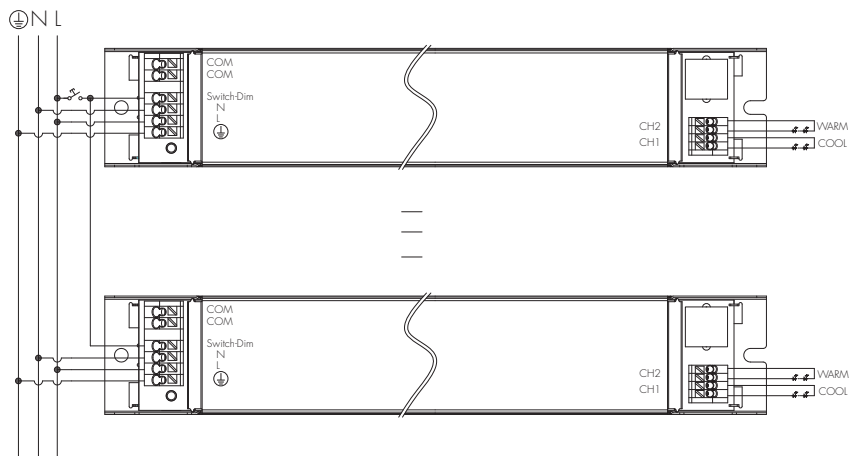

Wire Preparation

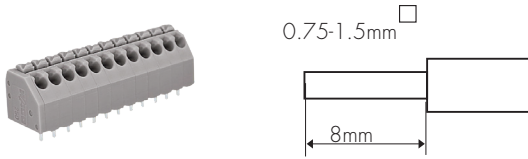

Solid or Stranded wire type 0.75 - 1.5mm².

To make or release the wire from the terminal, use a screwdriver to push down the button.

Loading and In-rush Current

HHC2045 & HHC2050L

Inrush Current (I _{max.})	53A
Pulse Time	36 μs

Circuit Breaker Information

Automatic circuit breaker type	B16A	B10A	B13A	B20A	B25A
HHC2045	43	27	35	54	67
HHC2050L	36	23	29	46	57


The data above is calculated according to the formula: Maximum Amount = $16 / (P_n / 230)$. In order to provide a more reliable reference in real application, the data have been revised to take 60% of the number calculated, i.e. $16 / (P_n / 230) \times 60\%$. Please kindly take note that the calculation is based on ABB circuit breaker series S200. Actual values may differ due to different types of circuit breaker used and installation environment.

Load distribution



Each channel can supply the maximum load and white balance can be control led as such:

Model	Colour Temperature	Cool White	Neutral White	Warm White
HHC2045	Power Distribution	CH1=45W, CH2=0W	CH1=22.5W, CH2=22.5W	CH1=0W, CH2=45W
HHC2050L	Power Distribution	CH1=50W, CH2=0W	CH1=25W, CH2=25W	CH1=0W, CH2=50W


Performance Characteristics

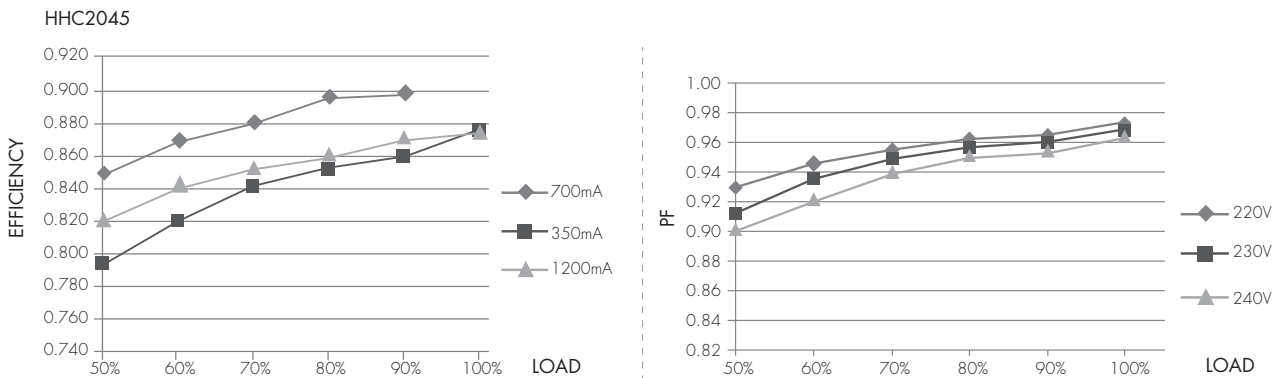

HHC2050L

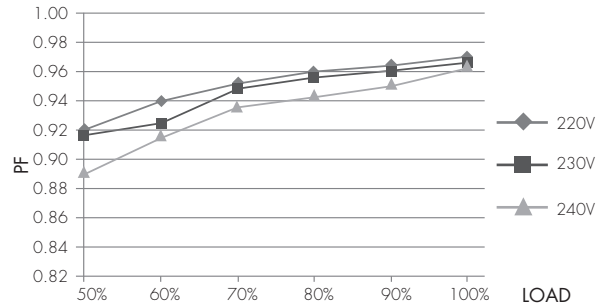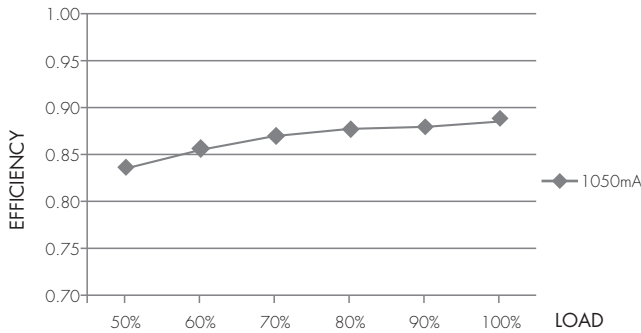

Dimming Characteristics

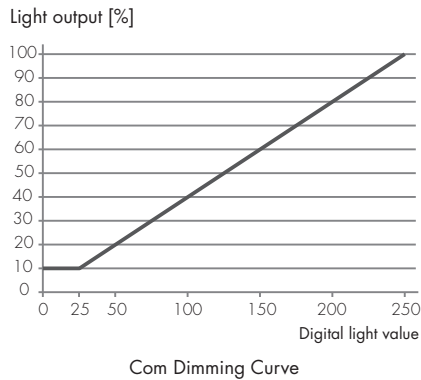

Technical Specifications for Sensor Heads

Bluetooth Transceiver	
Operation frequency	2.4 GHz - 2.483 GHz
Transmission power	4 dBm
Range (Typical indoor)	10~30m
Protocol	Bluetooth® 5.0 SIG Mesh

HF Sensor Properties (HBT01)	
Sensor principle	High Frequency (microwave)
Operation frequency	5.8GHz +/- 75MHz
Transmission power	<0.2mW
Detection range*	Max installation height: 3m Max detection range: 8m (diameter)
Detection angle	30° ~ 150°

Environment	
Operation temperature	Ta: -20°C ~ +55°C
Storage temperature	-20°C ~ +70°C
Relative humidity	0 ~ 90%
IP rating	IP20

PIR Sensor Properties (HIR13 / HIR16)	
Sensor principle	PIR detection
Operation voltage	5VDC
Detection range *	HIR13 Max installation height: 15m (forklift) 12m (single person) Max detection range: 24m (diameter)
	HIR16 Max installation height: 15m (forklift) 12m (single person) Max detection range: 18m * 6m (L * W)
	Detection angle



* The detection range is heavily influenced by sensor placement (angle) and different walking paces. It may be reduced under certain conditions.

PIR & microwave sensor heads

The range of PIR and microwave sensor heads below with Bluetooth modules built in offers powerful number of Plug'n'Play feature options to expand the flexibility of luminaire design. This approach to luminaire design reduces space requirements and component costs whilst simplifying production.



A. HBT01

Surface mounting
 Photocell Advance™
 The cable length is around 30cm.

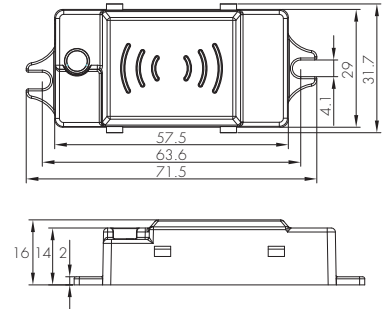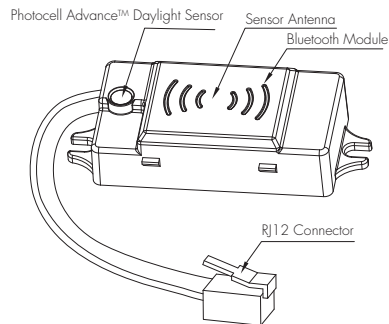


B. HBT02

Surface mounting
 Without motion sensor
 Photocell Advance™
 The cable length is around 30cm.

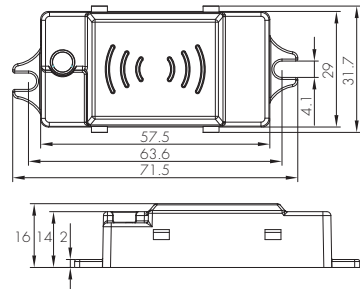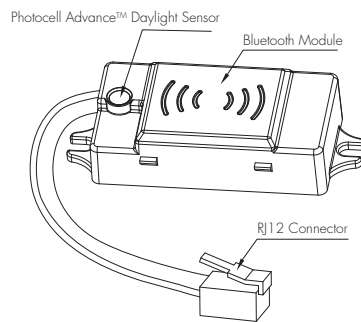


C. HIR13/S

Surface mounting
 For highbay application
 Lens part IP42 (IP64 can be made upon request)
 The cable length is around 30cm.

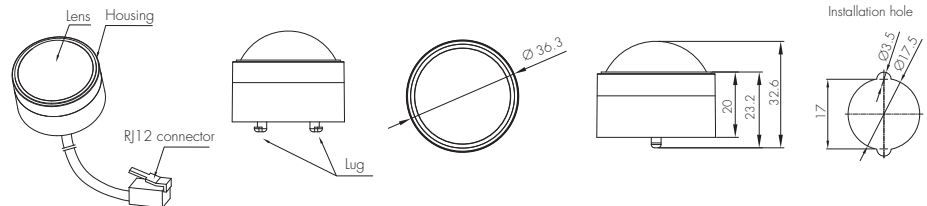


D. HIR13/F

Flush mounting
 For highbay application
 Lens part IP42 (IP64 can be made upon request)
 The cable length is around 30cm.

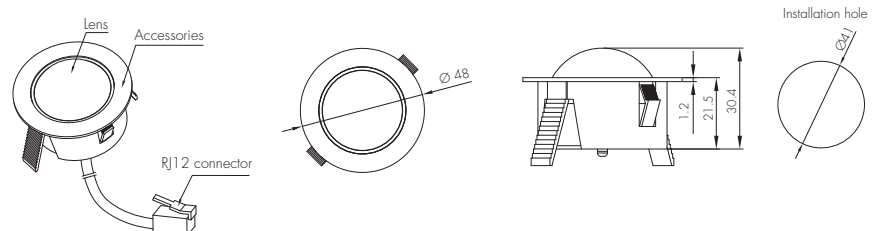


E. HIR13/C

Screw to the luminaire by conduit
 For highbay application
 Lens part IP42 (IP64 can be made upon request)
 The cable length is around 30cm.

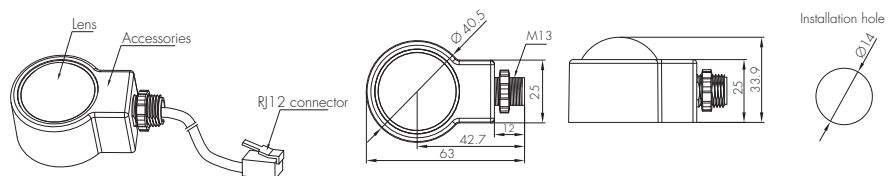

F. HIR16

PIR sensor head
 For highbay application
 IP65 (lens part)
 The cable length is around 30cm.

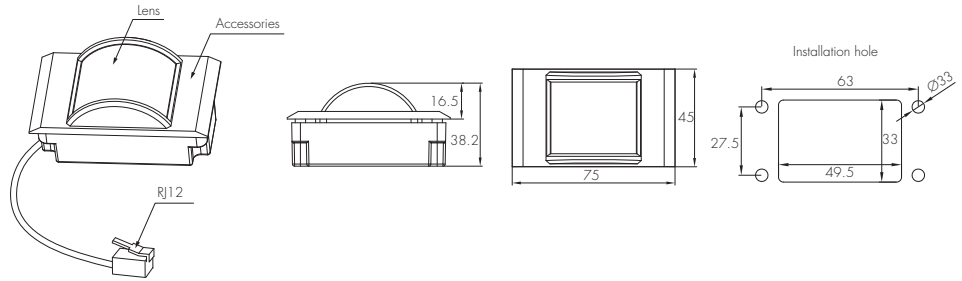


Installation for HIR16

We suggest that the metal plate thickness to be 0.8mm - 1.6mm to ensure perfect focal length for the PIR lens.

Detection Pattern


HBT01

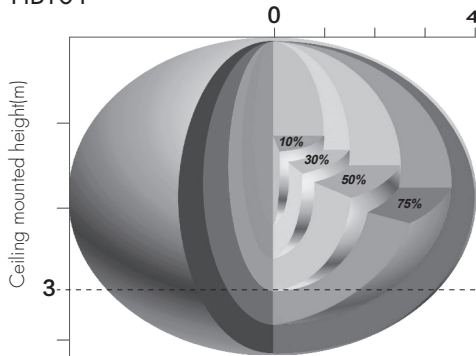

The detection range is heavily influenced by sensor placement (angle) and different walking paces.

It may be reduced to 2m(diameter) & 3m(height) under certain conditions (walking across).

HIR16

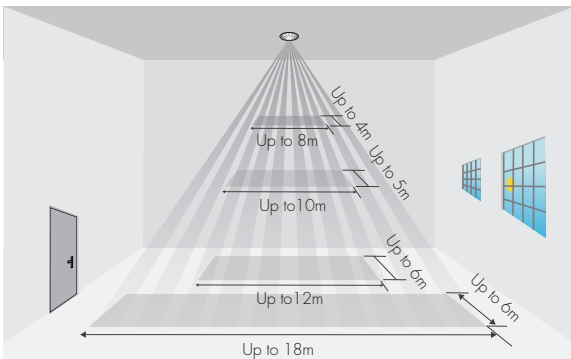

*The detection patterns are based upon 5km/h movement speed.

HIR13 (High-bay)



HIR13: High-bay lens detection pattern for forklift @ Ta = 20°C
(Recommended installation height 10m-15m)

A: Tangential movement	B: Radial movement	Mount height	Tangential (A)	Radial (B)
		10m	max 380m ² (Ø = 22m)	max 201m ² (Ø = 16m)
		11m	max 452m ² (Ø = 24m)	max 201m ² (Ø = 16m)
		12m	max 452m ² (Ø = 24m)	max 201m ² (Ø = 16m)
		13m	max 452m ² (Ø = 24m)	max 177m ² (Ø = 15m)
		14m	max 452m ² (Ø = 24m)	max 133m ² (Ø = 13m)
		15m	max 452m ² (Ø = 24m)	max 113m ² (Ø = 12m)



HIR13: High-bay lens detection pattern for single person @ Ta = 20°C
(Recommended installation height 2.5m-12m)

A: Tangential movement	B: Radial movement	Mount height	Tangential (A)	Radial (B)
		2.5m	max 50m ² (Ø = 8m)	max 7m ² (Ø = 3m)
		6m	max 104m ² (Ø = 11.5m)	max 7m ² (Ø = 3m)
		8m	max 154m ² (Ø = 14m)	max 7m ² (Ø = 3m)
		10m	max 227m ² (Ø = 17m)	max 7m ² (Ø = 3m)
		11m	max 269m ² (Ø = 18.5m)	max 7m ² (Ø = 3m)
		12m	max 314m ² (Ø = 20m)	max 7m ² (Ø = 3m)

Dimming Interface Operation Notes

Switch-Dim

The provided Switch-Dim interface allows for a simple dimming method using commercially available non-latching (momentary) wall switches. Up to 64 LED drivers may be connected to one switch. Detailed Push switch configurations can be set on Koolmesh app.

Switch Function	Action	Descriptions
Push switch	Short press (<1 second) * Short press has to be longer than 0.1s, or it will be invalid.	- Turn on/off - Recall a scene - Turn on only - Quit manual mode - Turn off only - Do nothing
	Double push	- Turn on only - Quit manual mode - Turn off only - Do nothing - Recall a scene
	Long press (≥1 second)	- Dimming - Colour tuning - Do nothing
Sensor-link	/	- Upgrade a normal on/off motion sensor to a Bluetooth controlled motion sensor
Emergency Self-Test Function	Short press (<1 second) * Short press has to be longer than 0.1s, or it will be invalid.	- Start Self test (Monthly) - Stop Self test - Start Self test (Annually) - Invalid
	Long press (≥1 second)	- Start Self test (Monthly) - Stop Self test - Start Self test (Annually) - Invalid
Fire Alarm (VFC signal only)	Refer to Koolmesh™ App User Manual V2.1	- Able to connect the Fire Alarm system - Once the fire alarm system is triggered, all the luminaries controlled by the Push Switch will enter the preset scene (normally it's full on), after the fire alarm system gives the ending signal, all the luminaries controlled by this Push Switch will revert back to normal status.

Additional Information / Documents

- For full explanation of Hytronik Photocell Advance™ technology, please kindly refer to [www.hytronik.com/download ->knowledge ->Introduction of Photocell Advance](http://www.hytronik.com/download->knowledge->Introduction%20of%20Photocell%20Advance)
- To learn more about detailed product features/functions, please refer to [www.hytronik.com/download->knowledge ->Introduction of App Scenes and Product Functions](http://www.hytronik.com/download->knowledge->Introduction%20of%20App%20Scenes%20and%20Product%20Functions)
- Regarding precautions for Bluetooth product installation and operation, please kindly refer to [www.hytronik.com/download ->knowledge ->Bluetooth Products - Precautions for Product Installation and Operation](http://www.hytronik.com/download->knowledge->Bluetooth%20Products%20-%20Precautions%20for%20Product%20Installation%20and%20Operation)
- Regarding precautions for microwave sensor installation and operation, please kindly refer to [www.hytronik.com/download ->knowledge ->Microwave Sensors - Precautions for Product Installation and Operation](http://www.hytronik.com/download->knowledge->Microwave%20Sensors%20-%20Precautions%20for%20Product%20Installation%20and%20Operation)
- Regarding precautions for PIR Sensors installation and operation, please kindly refer to [www.hytronik.com/download ->knowledge ->PIR Sensors - Precautions for Product Installation and Operation](http://www.hytronik.com/download->knowledge->PIR%20Sensors%20-%20Precautions%20for%20Product%20Installation%20and%20Operation)
- Regarding precautions for LED driver installation and operation, please kindly refer to [www.hytronik.com/download ->knowledge ->LED Drivers - Precautions for Product Installation and Operation](http://www.hytronik.com/download->knowledge->LED%20Drivers%20-%20Precautions%20for%20Product%20Installation%20and%20Operation)
- Data sheet is subject to change without notice. Please always refer to the most recent release on [www.hytronik.com/products/bluetooth technology ->Bluetooth Drivers](http://www.hytronik.com/products/bluetooth%20technology->Bluetooth%20Drivers)
- Regarding Hytronik standard guarantee policy, please refer to [www.hytronik.com/download ->knowledge ->Hytronik Standard Guarantee Policy](http://www.hytronik.com/download->knowledge->Hytronik%20Standard%20Guarantee%20Policy)