

Installation and Instruction Manual

HYTRONIK®

Bluetooth Switch - ON/OFF Control

HBTD8200S/F

1. Technical Specifications

Product type	Bluetooth® Switch (Flush mount)
Mains voltage	220~240VAC 50Hz
Rated load	400VA(Capacitive); 800W(Resistive)
Stand-by power	<0.5W
Operation frequency	2.4 GHz - 2.483 GHz
Transmission power	4 dBm
Range (Typical)	10 ~ 30m
Protocol	Bluetooth® 5.0 SIG Mesh
Operation temperature	Ta: -20°C ~ +45°C
Case temperature (Max.)	Tc: +75°C
Storage temperature	-20°C ~ +60°C
Max. relative humidity	20 ~ 90%
IP rating	IP20
Impulse withstand voltage	2.5KV
Duty type	S1
Insulation material	PTI material group IIIa
Glow wire	level 3, 850°C
Protection	Built-in protection provide
Type of switch	Single load(single-pole disconnection)
Insulation	Class II

2. Download the App

Free App for set-up and commissioning

Bluetooth 5.0 SIG mesh



Smartphone app for both iOS & Android platform



Koolmesh Pro app for iPad





Web app/platform: www.iot.koolmesh.com

3. Installation

⚠ Warnings:


1. Installation must be carried out by a qualified engineer in accordance with local regulations.
2. Disconnect power supply before installing.
3. Ensure environmental conditions are suitable for electronic equipment

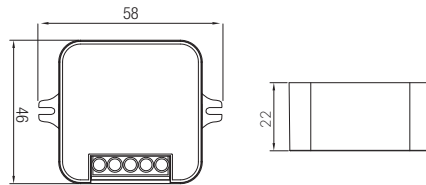


Wire Preparation



Rising clamp terminal.



Wiring Diagram

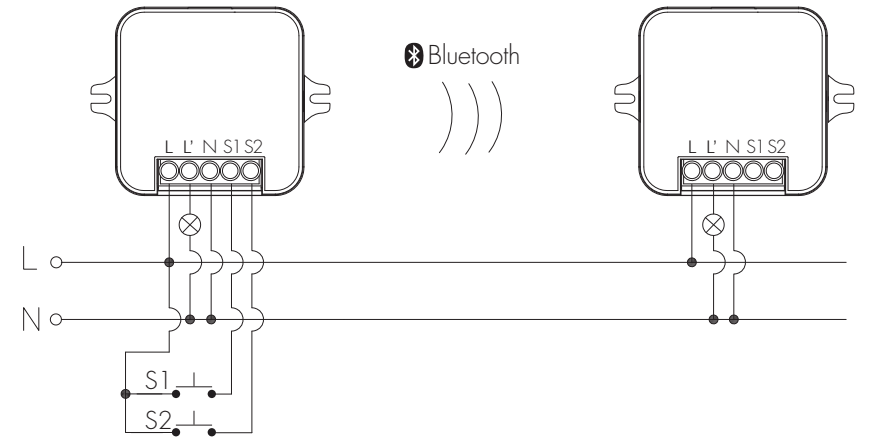

4. Dimming Interface Operation Notes

Switch-Dim

The provided Switch-Dim interface allows for a simple dimming method using commercially available non-latching (momentary) wall switches. Detailed Push switch configurations can be set on Koolmesh app.

Switch Function	Action	Descriptions
Push switch	Short press (<1 second) * Short press has to be longer than 0.1s, or it will be invalid.	- Turn on/off - Recall a scene - Turn on only - Quit manual mode - Turn off only - Do nothing
	Double push	- Turn on only - Quit manual mode - Turn off only - Recall a scene - Do nothing
	Long press (≥1 second)	- Dimming - Colour tuning - Do nothing
Sensorlink (VFC signal only)	/	- Upgrade a normal on/off motion sensor to a Bluetooth controlled motion sensor
Emergency Self-Test Function	Short press (<1 second) * Short press has to be longer than 0.1s, or it will be invalid.	- Start Self test (Monthly) - Stop Self test - Start Self test (Annually) - Invalid
	Long press (≥1 second)	- Start Self test (Monthly) - Stop Self test - Start Self test (Annually) - Invalid
Fire Alarm (VFC signal only)	Refer to Koolmesh App User Manual V2.1	- Able to connect the Fire Alarm system - Once the fire alarm system is triggered, all the luminaries controlled by the Push Switch will enter the preset scene (normally it's full on), after the fire alarm system gives the ending signal, all the luminaries controlled by this Push Switch will revert back to normal status.

5. Additional Information / Documents

1. To learn more about detailed product features/functions, please refer to www.hytronik.com/download -> knowledge -> Introduction of App Scenes and Product Functions
2. Regarding precautions for Bluetooth product installation and operation, please kindly refer to www.hytronik.com/download -> knowledge -> Bluetooth Products - Precautions for Product Installation and Operation
3. Data sheet is subject to change without notice. Please always refer to the most recent release on www.hytronik.com/products/bluetooth technology -> Bluetooth Dimmers
4. Regarding Hytronik standard guarantee policy, please refer to www.hytronik.com/download -> knowledge -> Hytronik Standard Guarantee Policy